

MORzA Observa Hidden Camera Setup Guide




# MORzA Observa Hidden Camera

Thank you for purchasing the MORzA Observa Hidden Camera. You are now ready to log onto BrickHouse Security's intuitive online platform and stream your video, as well as experience the wealth of other customizable features unique to MORzA Video Monitoring.

An email was sent containing your login and password information (subject: "BrickHouse Security MORzA Video Services - Login and Password"). Locate this email, and then visit www.brickhousesecurity.com, hover over Login in the upper right corner of the homepage and select MORzA Video from the dropdown menu; this will bring you to your account login. Once you log in you will be able to configure your camera online and customize your settings right from your PC.

#### In the Box:

- MORzA Observa Hidden Camera
- WiFi Antenna
- Camera Mounting Bracket
- Screws
- AC Power Adapter
- Network Cable
- User's Setup Guide

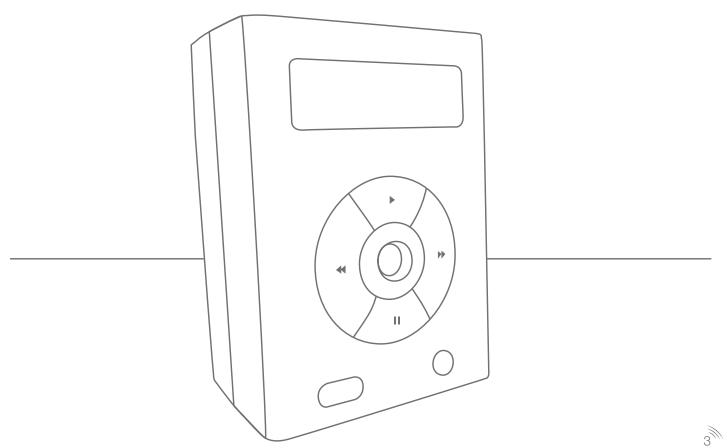


## Before You Begin

In this guide, you'll learn the fundamental information required to get your MORzA Observa Hidden Camera online and operational. In the following pages we'll illustrate the proper use and installation of the following MORzA Observa Hidden Camera components:

- WiFi Antenna
- Network Cable
- AC Power Adapter
- Mounting Bracket
- 1. Speaker (inactive)
- 2. Speaker Buttons (inactive) & Invisible IR's
- 3. Camera Lens
- 4. WPS Button
- 5. Antenna
- 6. Mount Bracket
- 7. Reset Button
- 8. Power
- 9. Ethernet
- 10. Alarm Inputs



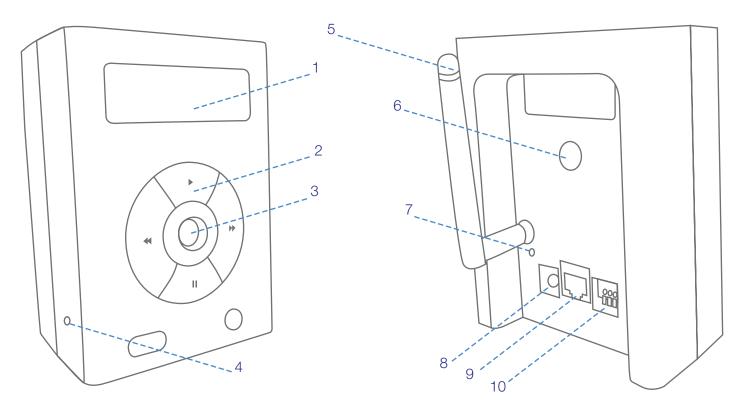

## **Installation Requirements**


- Internet Service: Broadband (Cable, DSL, or Fiber Optic).
- A Wireless Router with a WiFi Protected Setup (WPS) button or an open ethernet cable connection port.
- Personal Computer (Desktop/Laptop/Tablet) connected to the same network.
- Login/Password for MORzA Video Monitoring services.
- If your router does not have a WPS button and the camera will be connected to a wireless network, you will then
  need the case-sensitive SSID (wireless network name) and the Network encryption WEP key (if encryption is
  enabled at the router).

# Getting Started - Installation

- Step 1: Connect the camera's AC power adapter and plug it into a non-switched outlet.
- Step 2: Make sure you are on a computer that will be on the same network as the camera, log into your account at www.brickhousesecurity.com. Hover over Login in the upper right-hand corner of the page and click on "MORzA Video" within the drop-down menu.
- Step 3: Enter your username and the temporary password provided in your confirmation email.
- Step 4: Read and agree to the term and conditions.
- Step 5: You will then be prompted to change your password and select a security question. Press Submit when done.
- Step 6: Confirm your email address (recommended).

You are now logged in to your MORzA Video Account.



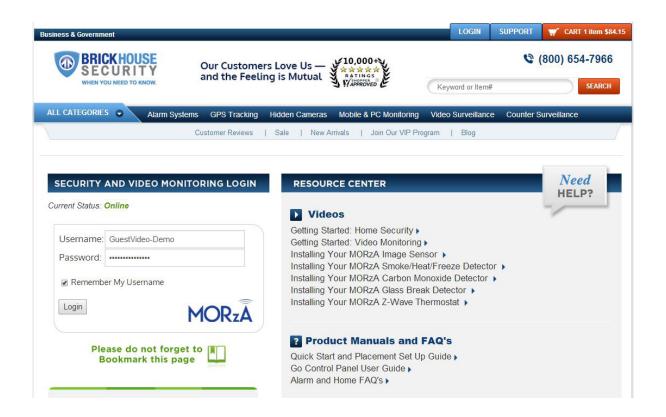


# Configuring Your Camera

- Step 1: In the Live Video tab, click where it says "Click here to add a camera to this account."
- Step 2: Using a paper clip, press and hold the camera's WPS button located on the side of the device for 3 seconds and then firmly press the corresponding WPS button on your router to sync the two devices.
- Note: If the router does not have a WPS button or if you have trouble connecting, use the included standard Ethernet cable to connect the camera to the network router.
- Step 3: Within the Settings tab, first select Video Device Settings. Then, highlight the New Camera field and click Continue.
- Step 4: Device Naming Set a name for your MORzA Observa camera and click Continue. It is best to label your camera so it corresponds to its location (ie. Living Room, Office, Cash Register).
- Step 5: Wait while your camera configures to your network.

Once the camera is done configuring, you can set up your WiFi connection or remain connected via the ethernet network cable.



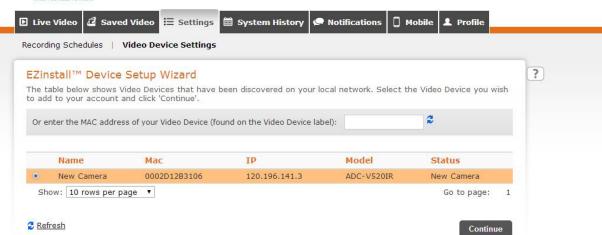

# Follow these steps to configure your WiFi connection

- Step 1: Under the Settings tab, select the Video Device Settings option to enter the EZinstall™ Device Setup Wizard. Select "Yes" Setup the wireless connection now.
- Step 2: Select "Scan for wireless networks"; choose your network and enter your secured password or encryption key and then select continue.
- Step 3: WiFi Settings are now saved to your Observa Camera. Unplug your camera and remove the ethernet cord. Plug your AC power adapter cord back into the device.
- Step 4: Select the Live Video tab. Your MORzA Observa Camera is now live.





## Settings

Within the MORzA Video Monitoring platform you're able to customize a number of recording settings, including:


### Recording Schedules:

Customize a time & date schedule for video recording based on motion detection. You will also be able to select how you will receive notifications on detected activity. Format Video Alert settings options to receive notifications through email or SMS.

### Video Device Settings:

Within the Video Device Settings tab, view device information, delete a camera, view live video, adjust motion detection, create windows to monitor specific areas and much, much more.



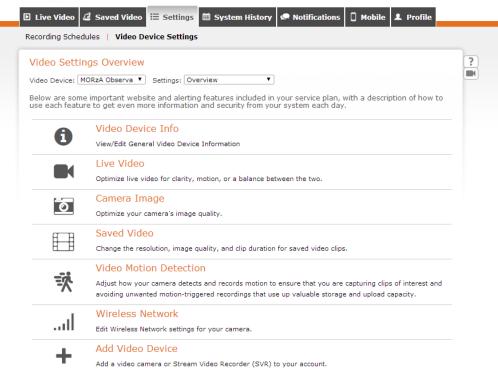

## **Notifications Tab**

The Notification tab lets you configure who receives alerts, how they receive them, and when. Create notifications for system events based on video detection or monthly video upload quotas.

#### Address Book:

The Address Book screen allows you to view, edit, and delete names and addresses in your address book.

#### Name:

The name of the contact, listed first name, then last name. Click on the name to edit contact information for that person. (To edit the primary phone number and email address for the account holder (master user), click on the Profile tab then Account Info).

#### Contact Information:

The phone number or e-mail address where the person can be contacted.

#### Notifications:

This column gives the current status for each address in your address book. To pause or activate notifications to a specific address, click Active or Paused to toggle the status.

Click the Delete link corresponding to a contact to remove a person's name and addresses from your address book.

### **Profile Tab**

### Manage Logins:

Create additional logins that can access this account through the website or mobile app. You have control to limit access and permissions by login.

### Login Information and Settings:

Change password, choose a new login name and change current email address.

### Account Information:

Use this screen to manage your account information. Your mailing address may differ from your system address, which is the location where the system is installed.

### System Information:

Use this screen to manage system information, including system name, address and time zone. The system address is the location where the system is installed.

### Multi-System Access:

If you have access to more than one system (e.g., home, office, and vacation rental; or multiple store branches), you can enable the current login (ex. GuestVideo-Demo) to have access to all of them. To add a system to your current login, enter the login and password for that system and click Submit. You can add one login/account at a time, and repeat the process for multiple accounts.

For more technical assistance please go to <a href="http://help.brickhousesecurity.com">http://help.brickhousesecurity.com</a> or call (866) 952 5276.

Video Monitoring is only one component of the wealth of services MORzA offers. Protect your property with a fully monitored MORzA Home Security System, and take remote control of your home's lighting, heating and appliances with MORzA Home Automation. And, when you combine service, you're guaranteed monthly savings.

Call 866-952-5276 for more information.



www.brickhousesecurity.com