
TECH TIPS – AFTER SALES SUPPORT



Subject: Tech Tips Tuesday: Straight Cool On A2L HD ODU

Brief Summary: This Tech Tip covers the straight cool wiring configuration on our HD series. The first picture shows the wiring configuration while only using 2 wires. The two wires from the IDU go to Y & C. Please wire a jumper from Y to O and Y to Y2. If you have 3 or more wires, please wire C, Y, & Y2 and put a jumper wire from Y to O. Set the S5 Dipswitch 2 to the “On” position when using the units in straight cool.

Scan the QR code for the Hi-Tech app for additional information and support!



2 Wires Only

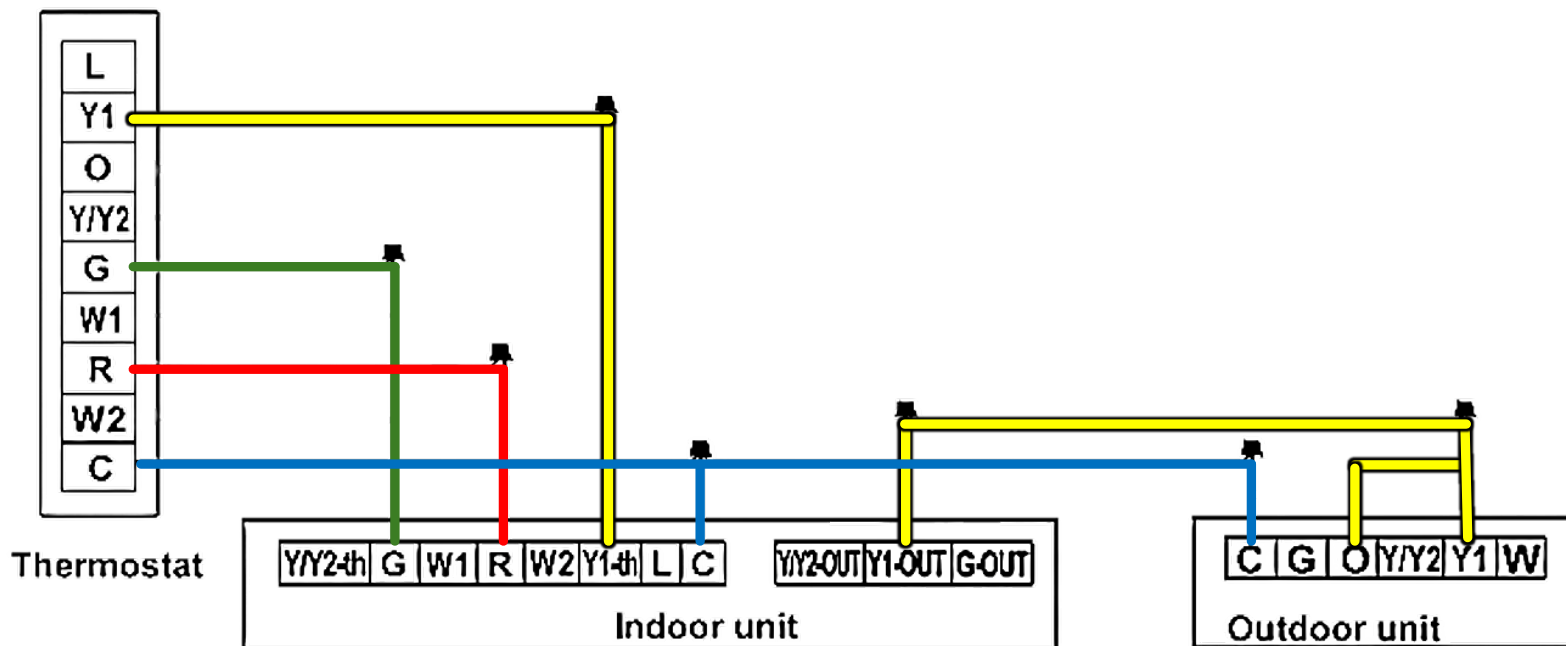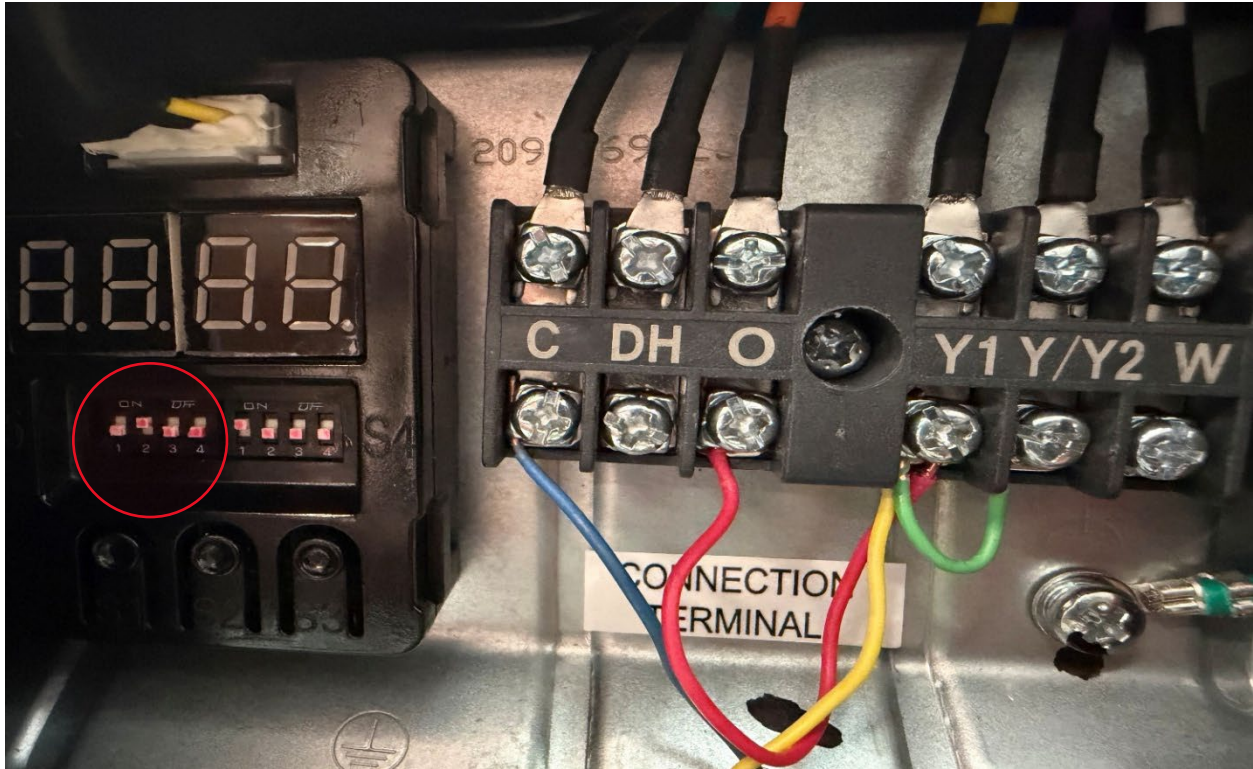

3 Wires Only

