



# Getac



## S510 SM Parts

August, 2024



# CONFIDENTIALITY NOTICE

All contents / materials of this presentation contain important management and technical information and are proprietary and confidential information of Getac Technology Corporation and its subsidiaries. Leaking or forwarding any content / material of this presentation is strictly prohibited.

---

All contents / materials of this event are intended for viewing by the attendees only. Photograph and recording are prohibited throughout the presentation.

---

Photos or recordings taken on-site may result in immediate deletion of the contents and the attendees may be asked to leave this presentation immediately.

**THIS IS A COVER SHEET FOR CONFIDENTIAL INFORMATION**



# CONFIDENTIALITY

# Level 3

This document is confidential and contains proprietary information and intellectual property of Getac Technology Corporation and its subsidiaries (“Getac Group”). Neither this document nor any of the information contained herein may be reproduced or disclosed under any circumstances without prior express written permission of Getac Group. Please be aware that disclosure, copying or distribution of this document and the information contained therein is strictly prohibited.

All Getac Employees handling this document must be in accordance with most up-to-date Confidentiality Policy of Getac Group.

**THIS IS A COVER SHEET FOR CONFIDENTIAL INFORMATION**


# Content

---

- Battery Pack (P/N 441GA8900001 )
- Dummy battery (P/N 344GA8900016 )
- AC Adapter & Power Cord (P/N 442883100001 & 332800003018 )
- Protection Film (P/N 319156017003 )
- Stylus & String (P/N 340GA8900001 & 340GA3400011)
- Handle (P/N 344876800018 )
- Right Side Door (P/N 340GA8900013)
- Rear Door (P/N 340GA8900014 )
- Option Door (P/N 344GA8900012 )
- SSD CANISTER (P/N 5811GA8900003)
- SSD (P/N 523445961021)
- Keyboard (P/N 5310GA890027)

## Battery Pack (P/N 441GA8900001)

1. Slide the security lock toward the battery pack and then toward the unlocked position to release the battery pack.

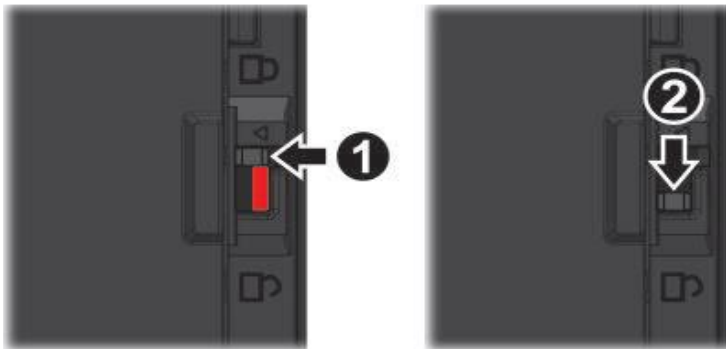


2. Remove the battery pack from its compartment.



441GA8900001

## Dummy battery (P/N 344GA8900016)

1. Slide the security lock toward the dummy battery pack and then toward the unlocked position to release the dummy battery pack.

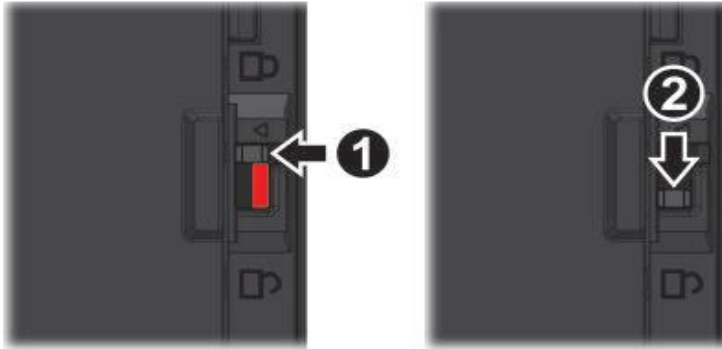

2. Remove the dummy battery pack from its compartment.



344GA8900016

# AC Adapter & Power Cord (P/N 442883100001 & 332800003018 )

## Accessory-AC Adapter & Power Cord



442883100001



332800003018

# Protection Film (P/N 319156017003)

---

Accessory-Protection film



319156017003

## Handle (P/N 344876800018 )

1. Remove the four screws (342830700019), then remove the cover.



2. Remove the handle.



344876800018

# Stylus & String (P/N 340GA8900001 & 340GA3400011)

## Accessory- Stylus & String



340GA8900001



340GA3400011

## Right Side Door (P/N 340GA8900013)

1. Remove the four screws (371102610021) lock the Right Side door, then remove the Right Side door.
2. Assemble back the new one.



340GA8900013

## Rear Door (P/N 340GA8900014 )


1. Remove the three screws (371102610021) lock the Rear door, then remove the Rear door.
2. Assemble back the new one.



340GA8900014

## Option Door (P/N 344GA8900012 )

1. Remove the three screws (371102610021) lock the Option door, then remove the Option door.
2. Assemble back the new one.

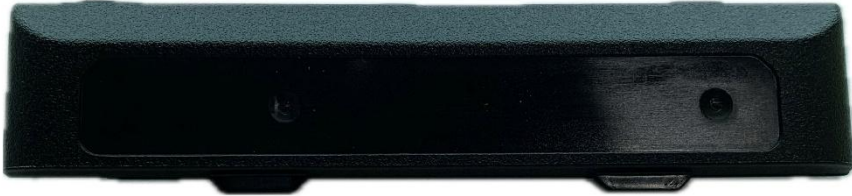

344GA8900012

# SSD CANISTER (P/N 5811GA890003)

Accessory - SSD CANISTER



5811GA890003

# SSD (P/N 523445961021)

1. Removing Battery Pack.
2. Remove the screw (370102010421) (if existing) from the SSD module.



3. Slide the security latch to the unlocked position (1) and hold it there. Meanwhile, using the protruded frame as a point to apply force, slide the SSD module outwards (2) to release the module.




# SSD (P/N 523445961021)

4. Remove one screw (371102010066), and then remove the cover.



5. Remove the thermal pad. Pull out the SSD from the case.

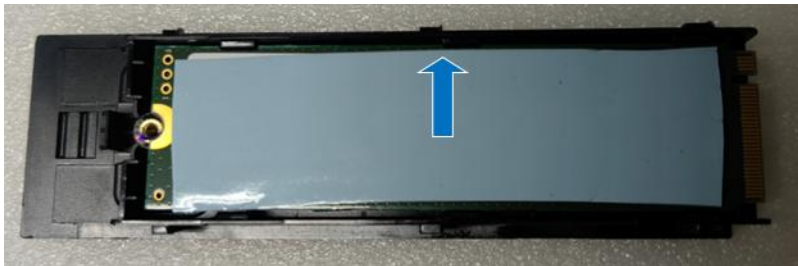

523445961021

# Keyboard (P/N 5310GA890027)



5310GA890027

# Keyboard (P/N 5310GA890027)

To remove:

1. Remove four screws (371102010432) that lock the keyboard cover.



2. Remove the keyboard cover.



# Keyboard (P/N 5310GA890027)

3. Remove 2 screws (371102010066) that lock the keyboard then turn the keyboard over.



4. Remove 4 screws (371102010432) that lock the keyboard bracket cover then remove the keyboard bracket cover.



# Keyboard (P/N 5310GA890027)

5. Disconnect the keyboard FPC.



To install:

Reverse the removal procedure to install the new part.