The new standard in HDMI matrix technology

The Just Add Power 2G+ Rackmount 3-in-1 Transmitter has all of the features of 2G models, with these hardware additions:

- **Stereo output with audio delay**
- **CEC Control**
- **USB 2.0 over IP**
- **Null Modem-integrated RS232**
- **HDMI Pass-through**

Features
Compatible with all 2G products
CEC control
Locking HDMI cable
HDMI Pass-through
RS232 with integrated null modem
Stereo audio output + 170ms audio delay
USB 2.0 over IP
All 2G features
• Stereo or multi-channel audio
• Instant-seamless Switching
• Video Wall
• Image Pull
• 2-way RS232 control

Mix-and-match! The 2G+ Rackmount 3-in-1 Transmitter features are fully compatible with all 2G and 2G+AVP models. Enhance an installation by adding 2G+ pieces wherever additional features are needed.
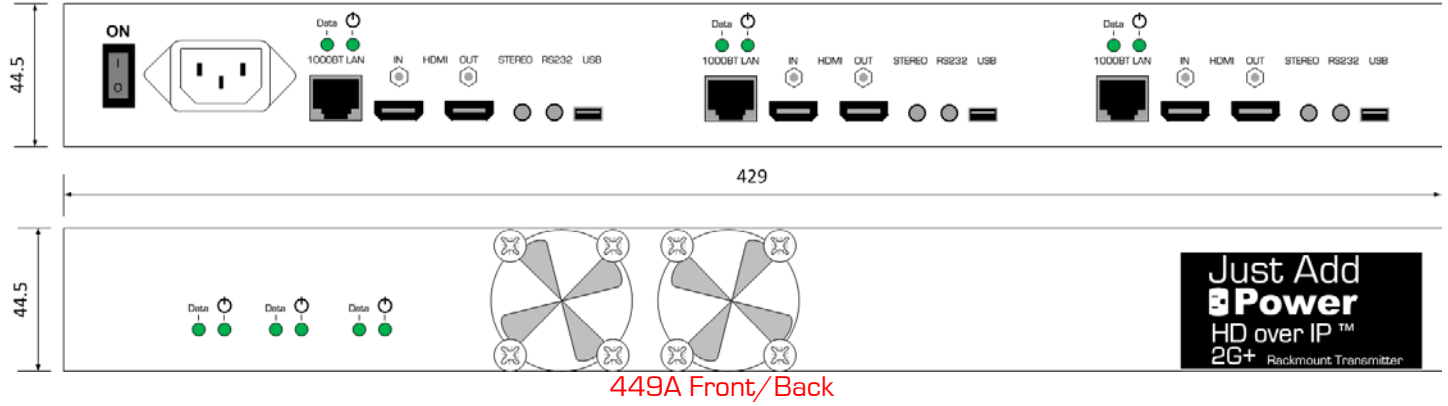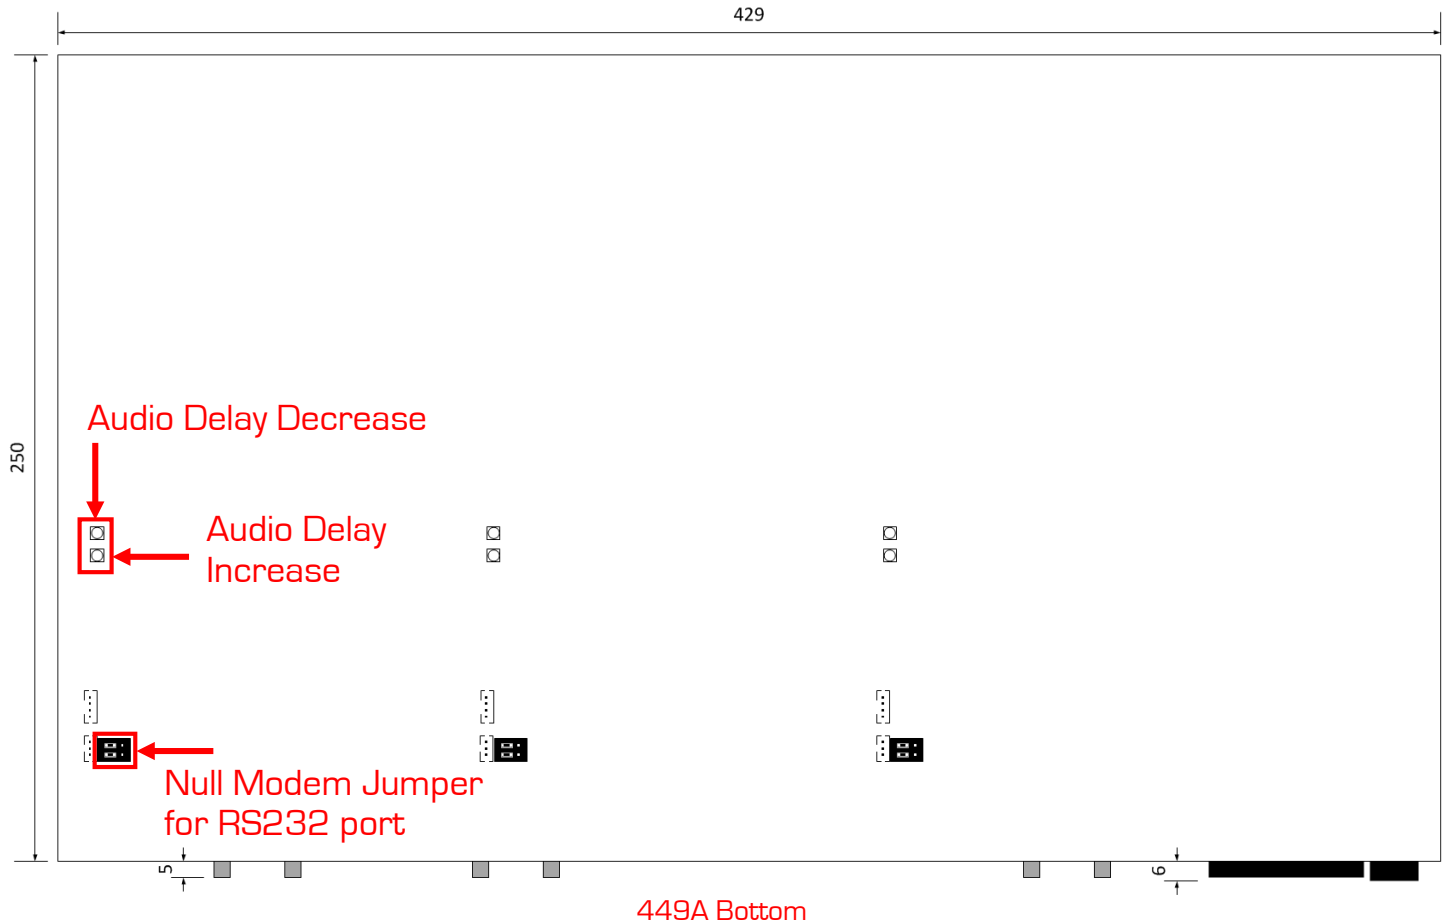
2G+ 3-in-1 Rackmount Transmitter

ETHERNET
HDMI IN
HDMI OUT
USB
RS232
STEREO

Compliancy	HDCP & RoHS/FCC/CE
Operating Temp	0-60 °C / 32-140 °F
Supported Resolutions	Up to 1080p50/60 Hz PC: 1920 x 1200
Dimensions & Weight	429 x 44.5 x 250 mm 17" x 1.75" x 9.8" (19-inch rack, 1 RU) 2.9 kg / 6.4 lb
Ports	HDMI Out (x3) HDMI In (x3) Ethernet connector (x3) 3.5mm Stereo Out (x3) 3.5mm RS232 w/ null modem (x3) Micro-USB (x3)
Bandwidth	Up to 150 Mbps
Power Supply (included)	Standard Power Cable IEC 60320 C13/C14 30 watts maximum

All measurements are in millimeters (mm)

449A Front/Back

Audio Delay Decrease

Audio Delay Increase

Null Modem Jumper for RS232 port

449A Bottom