



VERTIV™

Liebert®

PSI-XR

1kVA–3kVA

High Performance Power Protection for
Servers and Networking Equipment



FEATURES

Lowest Total Cost of Ownership

- Operates at a high 0.9 power factor that makes it ideal for today's modern IT equipment, providing 29% more power than typical UPS
- Reduced installation time and costs - shipped with batteries connected and charged
- 3 year warranty – no-hassle replacement
- Supports Liebert® Multilink shutdown software

Higher Availability

- Greater than three to five minutes of internal battery backup time at 100% load provides ample time for an orderly shutdown of equipment.
- Buck/boost automatic voltage regulation technology protects against utility voltage fluctuation by raising and lowering utility power to the level needed by connected equipment

Flexibility

- Six to seven battery-backed outlets for Liebert® PSI-XR models
- User replaceable and hot-swappable batteries
- Rack/Tower Convertible with rotatable display panel, 2U in height on all models
- Multiple remote communications and shutdown options provide remote monitoring and power management - EB/ SNMP, USB, contact closure and remote power off

Liebert® PSI is a feature-rich UPS system with industry leading 0.9 power factor. Its high power output delivers superior performance on power factor corrected (PFC) power supply and satisfactory backup time in the high demand environment. Liebert® Multilink UPS software protects servers through local USB communication or via network. Matching external battery cabinets offer UPS backup time to several hours in the extended requirements.

Ideally Suited for

- Network Computers
- Servers
- Network Closets
- Computer rooms
- Large Network Peripherals
- Network Storage Devices



Rotatable Display Panel

90 degrees rotatable LED display panel rotates 90° to make the readout of the LED display easy to see in rack or tower position.

Automatic Frequency Sensing

The UPS automatically adjusts to the input frequency, 50Hz or 60Hz.

Reliable UPS Protection And Extended Battery Time To Keep Your Network Up And Running

The flexible design of Liebert® PSI allows the unit to be configured as a self-standing tower or to be rack-mounted within a 2U space. It is available in four capacities, in both 120V or 230V models.

The UPS features an innovative design incorporating buck/boost automatic voltage regulation technology. This protects against utility voltage fluctuation by raising and lowering utility power to the level needed by the connected equipment. It also allows the UPS to prolong battery life by maximizing its time on utility power before going to battery.



Optional Liebert® MicroPOD Output Distribution And Maintenance Bypass Module

When your computer system can't be without power, even for scheduled UPS maintenance, the Liebert® MicroPOD Maintenance Bypass and Output Distribution Unit ensures continuous uptime. It allows you to manually transfer connected equipment to utility power via a maintenance bypass switch, permitting scheduled service or UPS replacement without the need to shut down connected equipment.

Features include:

- 2U height minimizes rack space requirements
- Installs with plug-and-play ease
- Two-year, no-hassle replacement warranty




Liebert® Multilink provides you:

- UPS monitoring software
- Operates with single computers or large networks
- Initiates shutdown when needed
- Supports email, pagers, audio and on-screen notification



Liebert® PSI-XR has matching external battery cabinets that enables longer backup time to several hours in the extended requirements. It provides greater than five minutes of internal battery backup time at 100% load measured at pf 0.9.

Liebert® PSI-XR Rear View Parts

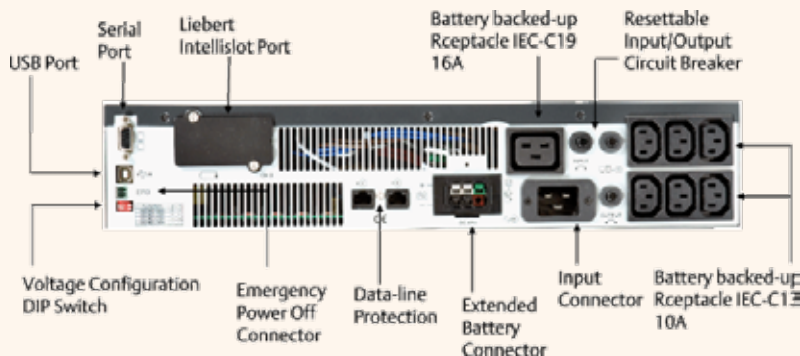

Battery Runtime Chart

(Runtimes are in minutes, assuming fully charged batteries at 25°C)

NUMBER OF BATTERIES	%LOAD	PS100RT3-230XR	PSI500RT3-230XR	PS2200RT3-230XR	PS3000RT3-230XR
Internal Battery	50	15	13	14	13
	100	6	5	5	5
Internal Battery+1 External Battery Cabinet	50	73	55	45	31
	100	31	18	15	12
Internal Battery+2 External Battery Cabinets	50	129	95	67	56
	100	65	46	29	18
Internal Battery+3 External Battery Cabinets	50	181	131	95	73
	100	96	64	48	31
Internal Battery+4 External Battery Cabinets	50	233	167	143	95
	100	124	82	72	47
Internal Battery+5 External Battery Cabinets	50	185	203	167	113
	100	151	109	84	56
Internal Battery +6 External Battery Cabinets	50	336	239	191	131
	100	179	124	102	65

* For connecting more external battery cabinets, please contact Vertiv staff

Battery Cabinet Specifications

MODEL NUMBER	PSRT3-24VBXR	PSRT3-48VBXR
Used w/ UPS Model	PS1000RT3-230XR / PSI500RT3-230XR	PS2200RT3-230XR / PS3000RT3-230XR
Unit Dimensions/ Shipping Dim. : (mm)	88(2U) x 440 x 490.5 / 560 x 675	
Net Weight / Shipping Weight: kg	29 / 33	
Battery Type	Sealed, non-spillage, maintenance-free, lead acid with 5 year typical lifetime	
Operation Condition	3,000 meter max. elevation, 0-90% humidity non condensing 0-40 deg. C	
Form Factor	Rack/ Tower Convertible, Tower Stand and rail kit included	
EMI Classification	IEC/EN/AS62040-2 2nd Ed Class A	
Safety	IEC/EN/ AS62040-1-1	
Agency Approvals	Transportation	ISTA Procedure IA Certification
WEEE and ROHS	Yes	

Technical Specifications

MODEL NUMBER	PS1000RT3-230XR	PS1500RT3-230XR	PS2200RT3-230XR	PS3000RT3-230XR
Input Connection	IEC-320 C14		IEC-320 C20	
Output Connection	IEC-320 C13 x 6		IEC-320 C13 x 6 + C19 x 1	
Communication Interface	REPO, USB, Serial, Intellislot			
Dimensions: (mm)	88(2U) x 440 x 490.5		88 (2U) x 440 x 700.5	
Shipping Dimensions: (mm)	228 x 560 x 612		228 x 560 x 821	
Net Weight: (kg)	25	28	42	46
Shipping Weight: kg	29	32	47	51
Form Factor	Rack/Tower Convertible, Tower Stand included			
Input Power Cable	10A Cable		16A Cable	
Number of Output Cable	2		3	
Software	Liebert Multilink 4, support for Windows NT/2000/XP/Vista			
Operation	PS1500RT3-230XR		PS2200RT3-230XR	
Capacity (Volt-Amps, Watts)	1000/900	1500/1350	2200/1980	3000/2700
Normal Input Voltage	220/230/240VAC (configurable)			
Input Voltage Window	165-300VAC			
Input Frequency Window	45-65Hz			
Input Protection Type	Resettable Circuit Breaker			
Default frequency	50Hz			
Boost Mode Voltage	Input Voltage x 117%			
Buck Mode Voltage	Input Voltage , 115%			
Transfer Time (AC to DC)	4-6 ms typical			
Efficiency	>96% on Line Mode			
Surge Protection	660 J			
Output Voltage	220/230/240VAC (configurable)			
Output (battery mode) Voltage Regulation	>± 5%			
Output (battery mode) Wave Form	Pure Sine Wave			
Battery type	Sealed, non-spillage, maintenance-free, lead acid with 5 year typical lifetime			
Backup Time at full load pf 0.9	>6 minutes	>5 minutes	>5 minutes	>5 minutes
Typical Recharge Time	5 hours to 90%			
Hot Swappable Battery	Yes			
EMI Classification	IEC/EN/AS62040-2			
Agency Safety Approvals	IEC/EN/AS62040-1-1			
Transportation Approvals	ISTA Procedure 1A Certification			
WEEE and ROHS	Yes			
Operation Condition	3,000 meter max. elevation, 0-90% humidity non-condensing 0-40 deg. C			
Noise Level	>40dBA on Line Mode			
ACCESSORIES	PS1000RT3-230XR	PS1500RT3-230XR	PS2200RT3-230XR	PS3000RT3-230XR
Rack Mount Kit	RAILKITPS3G-AEC			
SNMP/WEB Management Card	IS-WEBRT3			
Maintenance Bypass Switch	MP2-210K		MP2-220L	
Extended Battery Cabinets	PSRT3-24VBXR		PSRT3-48VBXR	
Typical Runtime (VA/W)	PS1000RT3-230XR	PS1500RT3-230XR	PS2200RT3-230XR	PS3000RT3-230XR
200/180	55 minutes	70 minutes	85 minutes	110 minutes
400/360	25 minutes	32 minutes	55 minutes	70 minutes
600/540	14 minutes	20 minutes	31 minutes	46 minutes
800/720	9 minutes	13 minutes	23 minutes	32 minutes
1000/900	6 minutes	10 minutes	18 minutes	24 minutes
1500/1350	-	5 minutes	11 minutes	13 minutes
2000/1800	-	-	7 minutes	10 minutes
2500/2350	-	-	-	7 minutes
3000/2700	-	-	-	5 minutes



VertivCo.com

© 2018 Vertiv Co. All rights reserved. Vertiv, the Vertiv logo are trademarks or registered trademarks of Vertiv Co. All other names and logos referred to are trade names, trademarks or registered trademarks of their respective owners. While every precaution has been taken to ensure accuracy and completeness herein, Vertiv Co. assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications are subject to change without notice.

Vertiv-Liebert®PSI-XR-BR-EN-AU-v1